



# LED FIXTURE SPECIFICATION

MODEL # **HDT-EMG**




FINAL MODEL #			
PROJECT			
TYPE		AREA	
NOTES			

## STANDARD FEATURES: CEILING INDOOR

Fixture thermally tested to ensure longevity  
 Maximum light distribution throughout lens  
 Over current/voltage short circuit protection  
 UL and/or CSA Compliant Listed  
 Constant Current Design

FIXTURE	LED ENGINE
<b>BASE</b> CR Steel Construction	<b>LG/NICHIA/SAMSUNG, LED CHIPS</b>
<b>FINISH</b> Brushed Nickel	<b>LUMENS PER WATT</b> AVG 100-120 @Module Efficacy
<b>LENS</b> White Opal Acrylic	<b>KELVIN</b> 27K 30K 35K 40K 50K <b>CRI</b> 80+
<b>LOCATION</b> Damp	<b>DRIVER</b> 120 VOLTS 50/60Hz
<b>COMPLIANT</b> RoHS	<b>POWER FACTOR</b> High
<b>LIFE HOURS</b> 50,000	<b>TRIAC OR ELECTRONIC</b>
<b>WARRANTY</b> Limited 5 Years	Low Voltage Dimming Down To 5% With Wall Box Dimmers
<b>ASSEMBLED IN AMERICA</b>	<b>TESTED</b> LM80 and LM82

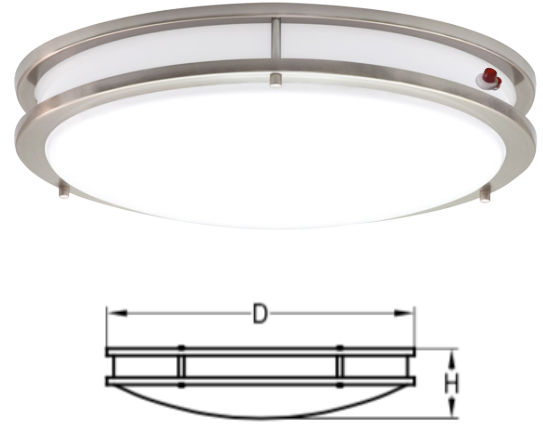

SIZE OPTIONS	
D10 H3 <sup>3/8</sup>	D16 H4 <sup>3/8</sup>
D12 H3 <sup>3/8</sup>	D18 H4 <sup>3/8</sup>
D14 <sup>1/2</sup> H4	D24 H5
	D31 H6

### LED LIGHT SOURCE OPTIONS\* ORDERING INFORMATION:

EXAMPLE

WATTAGE: 12      KELVIN: 3000k      SIZE: 5x2

WATTAGE:      KELVIN:      SIZE:

SYSTEM WATTAGE	2700K WARM WHITE	3000K SOFT WHITE	3500K NEUTRAL	4000K COOL WHITE	5000K DAYLIGHT	LEGACY EQUIVALENT
10/12 DRIVERLESS	1000/800	1000/900	1000/925	1025/1000		CFL 13
14/15 DRIVERLESS	1340/1450	1350/1500		1375/1500		CFL 2 x 13
22/24 DRIVERLESS	1900/2300	2100/2400	2150/2450	2200/2500		CFL 3 x 13
34 DRIVERLESS	3350	3400	3425	3450		
10	1060	1100	1160	1175	1250	CFL 18
12	1265	1360	1405	1460	1560	CFL 2 x 13
16	1650	1700	1720	1750	1800	CFL 2 x 18
20	2100	2140	2180	2200	2250	CFL 2 x 26
24	2570	2740	2830	2950	3150	CFL 2 x 32
31	3000	3165	3250	3400	3640	CFL 4 x 26
38	3695	3950	4075	4250	4540	CFL 4 x 42
50	5,000	5,200	5,400	5,600	5,800	

\*MORE OPTIONS AVAILABLE UPON REQUEST

## SPECIAL OPTIONS (please specify if applicable)

EXAMPLE

DRIVER: DVD      FINISH: FCU      LENS: LCU      ACCESSORIES: FUS      TECHNOLOGY: CT

DRIVER:      FINISH:      LENS:      ACCESSORIES:      TECHNOLOGY:

DRIVER	FINISH	LENS	ACCESSORIES	TECHNOLOGY
<b>STANDARD PRODUCT COMES: 120 VOLT (0-10V DIMMABLE)</b>  <input type="checkbox"/> DV 120/277 (Non Dimmable) <input type="checkbox"/> DVD 120/277 (0-10v Dimmable)	<input type="checkbox"/> FB Black <input type="checkbox"/> FBR Bronzestone  <input type="checkbox"/> FCU Custom Any RAL Finish <input type="checkbox"/> FSN Satin Nickel <input type="checkbox"/> FW White	<input type="checkbox"/> LCU Custom	<input type="checkbox"/> CCS Cable, Cord Suspension System <input type="checkbox"/> CPS Cable, Pendant Suspension System <input type="checkbox"/> FI Finial <input type="checkbox"/> FUS Fused <input type="checkbox"/> IB Individually Boxed <input type="checkbox"/> PCH Pull Chain <input type="checkbox"/> PK1 Canopy/Pendant Kit/1 ROD <input type="checkbox"/> PK2 Canopy/Pendant Kit/2 RODS <input type="checkbox"/> PK3 Canopy/Pendant Kit/3 RODS <input type="checkbox"/> SRP Surge Protection	<input type="checkbox"/> EMG Emergency (Any Lumens Package)  <input type="checkbox"/> BLD Bi-Level Dimming <input type="checkbox"/> CT LED Color Tuning <input type="checkbox"/> EMGR Emergency Remote <input type="checkbox"/> OS Occupancy Sensor On/Off <input type="checkbox"/> OSCD Occupancy Sensor Step Dimming

